


HSGQ-SG2024P

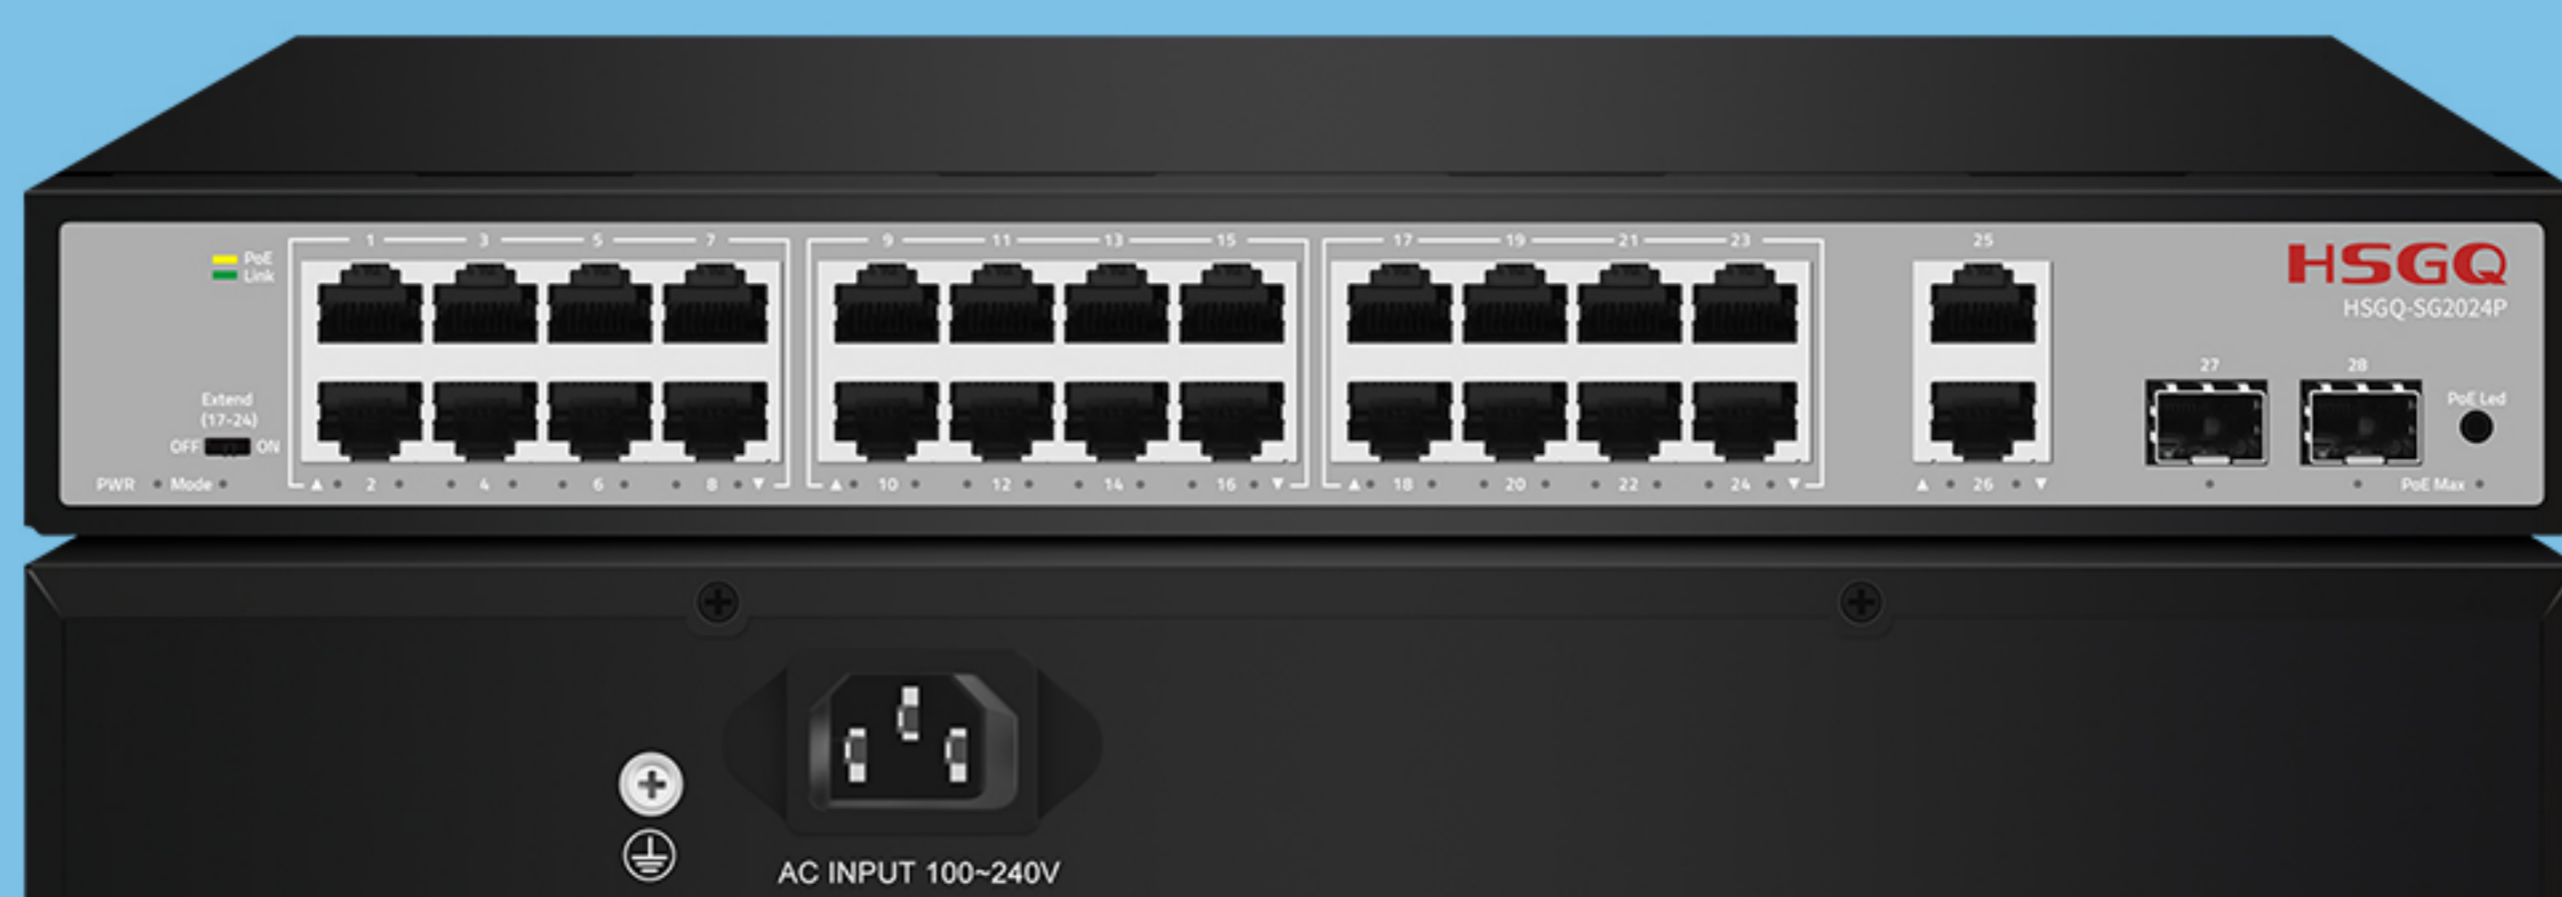

Product Description

28 Port gigabit intelligent standard PoE switch, using high-quality high-speed network IC and the most stable PoE chip, PoE port meets 802.3af / 802.3at standard, this series of PoE switch can be 10/100/1000M ethernet. The network provides a seamless connection, and the PoE power port can automatically detect and power the powered devices that comply with the IEEE802.3af / IEEE802.3at standards. The non-PoE device intelligently detects no power and only transmits data.

PoE is power over ethernet, which refers to the transmission of data signals to some IP-based terminals (such as IP phones, wireless access AP, network cameras, etc.), but also provides DC power for the device. Technically, these devices that receive DC power are called powered devices.

With simple and convenient installation and maintenance methods and rich business features, it helps users to build a safe and reliable high-performance network. It is mainly located in the core or convergence layer of user networks such as industrial parks, buildings, factories and mines, government agencies, and residential broadband; it can be widely used in ethernet access scenarios such as small and medium-sized enterprises, Internet cafes, hotels, and schools.

Product Features

I/O Interface	Power	AC100-240V50/60Hz
	Ethernet	24×Gigabit PoE Ports
		2×Uplink ports
2×Gigabit SFP Ports		
Performance	Chipset	EN8850DH, RTL8238B
	Bandwidth	56Gbps
	Pack Forward Rate	41.644Mpps
	Package Cache	3Mbit
	MAC Address	8K
	Forwarding Mode	Store and forward
Standard	Network Protocol	IEEE802.3 (Ethernet)
		IEEE802.3u (Fast Ethernet)
		IEEE802.3ab (Gigabit Ethernet)
		IEEE802.3x (Flow Control)
		IEEE 802.3z (Gigabit Ethernet Fiber Standard)
	PoE Protocol	IEEE802.3af(15.4W)
		IEEE802.3at(30W)
		PoE port output voltage: DC 44-57V PoE power supply core: 1/2+; 3/6-
	Industry Standard	EMS: EN61000-4-2 (ESD)
		EN61000-4-5 (Surge)
Network Medium	10Base-T: Cat 3, 4, 5 Class or above UTP/STP (≤100m)	
	100Base-TX: Cat 5 Class or above UTP/STP (≤100m)	
	1000Base-TX: Cat 5 Class or above UTP/STP (≤100m)	
Optical Media	Multimode optical fiber: 50/125, 62.5/125, 100/140um	
	Single-mode optical fiber: 8/125, 8.7/125, 9/125, 10/125um	
Environmental Standards	Working Environment	Working Temperature: -10~50°C
		Storage Temperature: -40~70°C
	Working Environment	Working humidity: 10%~90%, non-condensing
		Storage Temperature: 5%~95%, non-condensing
Mechanical	Structure Size	Product Dimensions: 320×207×44mm
		Package Dimensions: 370×290×85mm
		Product N.W: 1.967KG
		Product G.W: 2.497KG
	Packing Info	Carton Dimensions: 445×310×390mm Packing Quantity: 5 PCS Packing Weight: 13.485KG
Power Voltage	Input Voltage: AC 100-240 V 50-60Hz	
	Supply Power: 52V /5.76A	
Power	Non PoE board power: maximum 15W	
	PoE power: maximum 280W	

Product Specifications

Indicator	LED Indicators	PWR (Power)
		1-28 Green Light (Link&Data)
		1-24 (Yellow Light)
	PWR	PoE Led Key
		On: Powered on Off: Powered off
	1-20 Green Light (Link&Data)	On: Link normal Off: Link blocked Flashing: Data transmitting
		PoE Max PoE power light
		Off: indicates PoE power usage is less than 90% Flashing: Indicates PoE power usage of 90% ≤ P ≤ 95% On: Indicates that PoE power is used at 95% < P < 100%
	Mode DIP Switch light	On: Extend on Off: Extend off
		1-24 (Yellow Light)
PoE Led Key	On: PoE power supply is normal Off: PoE not powered	
	PoE Led Key	Dual color light selection: default green (link data), switch yellow light (PoE)
Extend DIP Switch	OFF: Common mode, all interfaces can communicate with each other, the transmission distance is less than 100 meters, the transmission rate is 10/100/1000M adaptive	
	ON: Link extension mode, 17-24 ports force 10M, link 250M (enable PoE watchdog), Port AI mode is enabled	

Key Features

- 24×10/100/1000M PoE Ports+2×Gigabit Uplink+2×Gigabit SFP Ports
- Comply with IEEE802.3, IEEE802.3u, IEEE802.3ab Standard
- Ethernet Ports support 10/100/1000M self- adaptive
- The AI mode is automatically enabled 10M speed for Ports 17~24 in Extend mode
- PoE priority is supported, from port 1 to port 24, which is enabled by default
- Flow control mode: full-duplex adopts IEEE 802.3x standard, half-duplex adopts Back pressure standard
- Zero configuration feature, automatically supplied to adaptive equipment
- Panel indicator monitoring status and help failure analysis
- With DIP switch, support Extend modes
- Support port lightning surge: common mode 4KV, differential mode 2KV (level B); Electrostatic ESD: air 8KV, contact 6KV (level C)

Application Environment

- Metro Optical Broadband Network: Data network operators such as telecommunications, cable TV, and network system integration, etc
- Broadband private network: Suitable for financial, government, oil, railway, electric power, public security, transportation, education and other industries
- Multimedia transmission: Integrated transmission of images, voice and data, suitable for remote teaching, conference TV, videophone and other applications
- Real-time monitoring: Simultaneous transmission of real-time control signals, images and data

Ordering Information

Product Model	Description
HSGQ-SG2024P	20 Port Gigabit Intelligent Standard PoE Switch

For more information, please visit: <http://www.hsgq.com>

Tel: 0755-8175 5526

Fax: 0755-8958 2791

Email: hsgq@hsgq.com

Factory Address: 5/F, Bldg C, Zone B, Hongfa Technology Industrial Park, Tangtuo Community, Shiyan St., Bao'an District, Shenzhen City, Guangdong Province, PRC China.

Copyright © 2024 Shenzhen Hs Fiber Communication Fuioument Co., LTD. All rights reserved

Attention: Due to product version upgrades or other reasons, the content of this document may be updated from time to time. Unless otherwise agreed.

All statements, information and recommendations in this document do not constitute any warranty of any kind, express or implied.

